

ETPS FEATURES

Available in heights up to 15 metres.
Supplied in two parts for ease of shipping, handling and installation.

Cabinet base and slim line base options available.
All camera maintenance carried out at ground level, eliminating the use of mechanical lifts for servicing purposes.

Totally concealed cable management avoiding any risk of vandalism to the power or data cables.
Ideally suited for CCTV installations where Health and Safety requirements are paramount.

Integral lockable cabinet with equipment mounting backboard. Numerous options are available for the doors from compression locks to high risk vault doors.

Various built in or transferable winch units are available across the range depending on required height.

Full British Applicable Standards for the towers available upon request including drawings, installation methods, structural calculations and base foundations.

SPECIFICATIONS

- Standard pan and tilt fixing of 101.6 PCD.
- Special dome mounting brackets available.
- Built in cable entry and exit points.
- Compatible with WEC adaptors, accessories and anti-climbs.
- 'Pocket' type roots available for restricted foundation locations.
- Other heights available on request.



Supplied in two parts for ease of shipping




Split Camera Trolley Pole ETPS

DESIGN FEATURES

- An ideal column for urban and traffic CCTV schemes.
- Camera maintenance carried out at ground level.
- The camera head rotates through 180 degrees for servicing purposes.
- Various built in and transferable winch options.
- In-built carriage failsafe braking mechanism.
- Excellent stability characteristics ensures minimal camera movement.
- Recommended for installation in high profile places.
- Suitable for all public access areas.
- Camera carriage unit has a self clamping mechanism to minimise deflection when in its working position.
- Totally concealed cable management facility.
- High security door option for high risk areas.
- Hot dipped galvanised finish for maximum weather protection and low maintenance requirements.
- Custom and bespoke versions tailored to the customer's requirements.
- Eliminates the use of mechanical lifts for servicing purposes.



Technical Specification

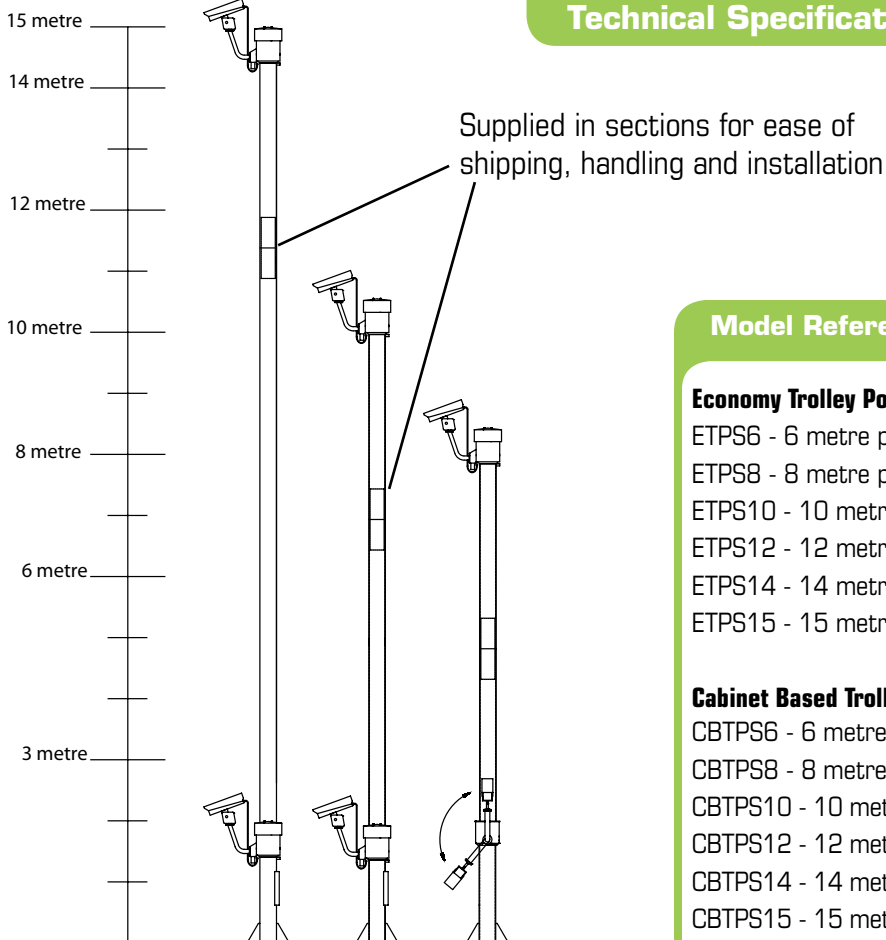

Model Reference

Economy Trolley Pole

ETPS6 - 6 metre pole
ETPS8 - 8 metre pole
ETPS10 - 10 metre pole
ETPS12 - 12 metre pole
ETPS14 - 14 metre pole
ETPS15 - 15 metre pole

Cabinet Based Trolley Pole

CBTPS6 - 6 metre pole
CBTPS8 - 8 metre pole
CBTPS10 - 10 metre pole
CBTPS12 - 12 metre pole
CBTPS14 - 14 metre pole
CBTPS15 - 15 metre pole

STANDARDS

Structural Steelwork:
BS EN 10210-1:1994,
BS EN 10210-2:1997

General Steelwork:
BS1449:1991,
BS1387:1985,
BS EN 10025:1993

Hot Dipped Galvanized:
BS EN ISO 1461:2009

Welding Procedures: Comply
with BS EN 1011-2:2001

Fasteners: Grade 8.8
BS3692:2001,
BS4190:2001,
DIN931, DIN934

Design Wind Loading: In
accordance with CP3 chapter
V Pt 2 & BS 6399 Pt 2:1997